

Stability of Multidimensional Systems Using Genetic Algorithms

Nikos E. Mastorakis, Ioannis F. Gonos, and M. N. S. Swamy

Abstract—The study of the stability of m -dimensional systems is a difficult one especially when $m \geq 3$. There exist only a few results in the literature and unfortunately, there does not exist any practical criterion. In this brief, the stability of an m -dimensional system is dealt as a minimization problem of the absolute value of its characteristic polynomial over the boundaries of its variables (i.e., on the m unit circles). This minimization problem is solved by using genetic algorithms (GAs). Using GAs we obtain, in general, better results than other methods of minimization (numerical techniques, neural networks, etc.). Numerical examples are presented.

I. INTRODUCTION

In the study of systems theory, stability plays an important role, since every designed system ought to be stable. A one-dimensional (1-D) discrete-time system is stable (in the bounded-input–bounded-output sense) if and only if its characteristic polynomial is devoid of any roots inside the unit disk and has no multiple roots on the unit circle. In the system theory literature, this kind of stability is also known as Schur stability. Also, for practical purposes and applications, there exist many tests such as Jury’s and Hurwitz’s tests that check the stability without finding the roots of the characteristic polynomial.

A multidimensional (m -D) linear, shift-invariant, discrete variable system described by the transfer function

$$G(z_1, \dots, z_m) = \frac{A(z_1, \dots, z_m)}{B(z_1, \dots, z_m)} \quad (1)$$

and having no nonessential singularity of the second kind [1], [2] is stable (in the bounded-input–bounded-output sense) if and only if

$$\begin{aligned} B(0, \dots, 0, z_m) &\neq 0, & \text{for } |z_m| \leq 1 \\ B(0, \dots, 0, z_{m-1}, z_m) &\neq 0, & \text{for } |z_{m-1}| \leq 1, |z_m| = 1 \\ &\vdots \\ B(0, z_2, \dots, z_{m-1}, z_m) &\neq 0, & \text{for } |z_2| \leq 1, |z_3| = \dots = |z_m| = 1 \\ B(z_1, z_2, \dots, z_m) &\neq 0, & \text{for } |z_1| \leq 1, |z_2| = \dots = |z_m| = 1. \end{aligned} \quad (2)$$

The above theorem is known as the theorem of *Anderson and Jury* [3], [4]. Unfortunately, for practical purposes (filtering, design of m -D filters, etc.) we need some more practical tests than the above theorem. In two-dimensional (2-D) systems, a great variety of practical tests have been produced in the last three decades (Jury’s 2-D test [1], [3], Schur–Cohn test [1], [3], Inners’ test [5], Zeheb–Walach test [6], [7], Mastorakis–Barnett test [8], [9], Partial Energies’ test [10], etc.). There are also a variety of special results and other considerations [11]–[13].

In m -D systems ($m > 2$), unfortunately, we have a complete lack of such tests, though we must refer to the contributions of [4]–[7] and [14]–[22]. Thus, it is difficult to check if a given m -D polynomial $B(z_1, \dots, z_m)$ corresponds to the characteristic polynomial of a stable

m -D system when $m > 2$. In the sequel, by the term stable or unstable polynomial, we mean the characteristic polynomial of a stable or unstable m -D (linear, shift-invariant, discrete variables) system. An important result in the stability of m -D system is given by the following theorem, known as DeCarlo–Strintzis theorem [1], [3], [14].

DeCarlo–Strintzis Theorem: $B(z_1, \dots, z_m)$ is a stable polynomial if and only if

$$B(z_1, 1, \dots, 1) \neq 0, \quad \text{for } |z_1| \leq 1 \quad (3.1)$$

$$B(1, z_2, 1, \dots, 1) \neq 0, \quad \text{for } |z_2| \leq 1 \quad (3.2)$$

\vdots

$$B(1, \dots, 1, z_m) \neq 0, \quad \text{for } |z_m| \leq 1 \quad (3.m)$$

$$B(z_1, \dots, z_m) \neq 0, \quad \text{for } |z_1| = \dots = |z_m| = 1 \quad (3.m+1)$$

and the transfer function for which $B(z_1, \dots, z_m)$ is the denominator has no nonessential singularity of the second kind.

In this brief, we will assume that the condition of the nonexistence of nonessential singularities of the second kind is fulfilled. The m first conditions of DeCarlo–Strintzis theorem actually consist of m 1-D conditions and are easy to be checked via any 1-D test (for example, the 1-D Jury test). In order to check the last equation of the DeCarlo–Strintzis’ theorem, a methodology based on genetic algorithms (GAs) is proposed here. This methodology is presented in the next section.

II. GA FOR CHECKING THE m -D SYSTEMS STABILITY

According to the DeCarlo–Strintzis Theorem, the first m conditions can be examined via any 1-D test (criterion). If some of these conditions are not satisfied, we easily conclude that the system is unstable, without examining the last condition (3.m+1). However, if these m conditions are fulfilled, then condition (3.m+1) is that which will “decide” the stability. If it is satisfied, then the system is stable; otherwise, it is unstable. In order to investigate the condition (3.m+1), we consider the minimum of the function f , where $f = f(w_1, w_2, \dots, w_m) = |B(e^{jw_1}, e^{jw_2}, \dots, e^{jw_m})|$. So, assuming that

$$\underline{M} = \min f \quad (4)$$

over $w_i \in [0, 2\pi]$, the condition (3.m+1) is equivalent to

$$\underline{M} > 0. \quad (5)$$

If $\underline{M} = 0$, the polynomial $B(z_1, \dots, z_m)$ is unstable. In general, the problem in question is how to find M avoiding any “trap” of local minima. Some of the existing methods of minimum search (numerical or neural networks’ techniques) usually give only local minima. On the other hand, GAs can find the global minimum \underline{M} in many cases, though such a convergence cannot always be guaranteed.

A brief overview of the theory of GAs is as follows. GAs are search algorithms, which initially were inspired by the process of natural genetics (reproduction of an original population, performance of crossover and mutation, selection of the best). The main idea for an optimization problem is to start our search not with one initial point, but with a population of initial points. The $2n$ numbers (parents) of this initial set (called population, quite analogously to the biological system) are converted to the binary system. In the sequel, they are considered as chromosomes (actually sequences of 0 and 1) “Parents” come to “reproduction” where they interchange parts of their “genetic material”. This procedure is called crossover. Moreover a very small probability for a mutation exists. (Mutation is the phenomenon where quite randomly—with a very small probability though—a 0 becomes 1 or a 1 becomes 0). Assume that every pair of “parents” gives rise to

Manuscript received February 8, 2002; revised October 25, 2002. This paper was recommended by Associate Editor T. Hinamoto.

N. E. Mastorakis is with the Department of Computer Science, Military Institutions of University Education, Hellenic Naval Academy, Piraeus 18539, Greece (e-mail: mastorakis@ieee.org).

I. F. Gonos is with the High Voltage Laboratory, School of Electrical and Computer Engineering, National Technical University of Athens, GR 15780 Athens, Greece (e-mail: igonos@ieee.org).

M. N. S. Swamy is with the Center for Signal Processing and Communications, Department of Electrical and Computer Engineering, Concordia University, Montreal, QC, Canada H3G 1M8 (e-mail: swamy@ece.concordia.ca).

Digital Object Identifier 10.1109/TCSI.2003.813968

k “children.” By the process of reproduction, the population of the “parents” is enhanced by the “children” and we have an increase in the original population because new members have been added (parents always belong to the population considered). The new population has now $2n + kn$ members. Then, the process of *natural selection* is applied. According to the concept of natural selection, from the $2n + kn$ members, only $2n$ survive. These $2n$ members are selected as the members with the highest values of f , if we are attempting to *maximize* f (or with the lowest values of f , if we are attempting to *minimize* f). By repeated iterations of reproduction (under crossover and mutation) and natural selection, we can find the minimum (or maximum) of f as the point to which the best values of our population converge. The termination criterion is fulfilled if the mean value of f in the $2n$ -members population is no longer improved (maximized or minimized), or if the number of iterations is greater than the maximum number of iterations N_{\max} , which is defined by us. A more detailed overview of GAs can be found in [23], [24].

In our problem of m -D systems stability, we wish to minimize f over w_1, w_2, \dots, w_m when $w_i \in [0, 2\pi]$, $i = 1, \dots, m$. To this end, w_1, w_2, \dots, w_m are converted to the binary system and are considered as part of a big chromosome. If we assume that every w_i is converted to a t -bits binary number, we need mt bits for the “chromosome” of w_1, w_2, \dots, w_m . Our search starts with a randomly generated population of such $2n$ chromosomes. In quite a random manner, this population is split into pairs of parents that will be crossed, i.e., they will interchange their genetic material (with c crossovers) always under a small probability p for mutation (for example $p = 0.01$). By this reproduction, a new population of $2n + kn$ members will be formed, since each pair of parents give birth to k children. The new population is filtered and only the $2n$ better members (here “better” means the $2n$ lowest values of $f(w_1, w_2, \dots, w_n)$) are retained in the population, and the others deleted. By repeated iterations of reproduction (under crossover and mutation) and natural selection, we can find the minimum of $f(w_1, w_2, \dots, w_n)$, $0 \leq w_i \leq 2\pi$, $i = 1, \dots, m$ as the point to which the best values of our population converge. The termination criterion is “the mean value of f in the population is no longer improved.” The algorithm is summarized as follows.

- STEP A: Find (randomly) the initial population of $2n$ members.
- STEP B: Split the population (randomly) into n pairs.
- STEP C: Make c crossovers and from each pair of parents take k children. Every bit of every child has a probability of p for a mutation.
- STEP D: Find the new population $2n + 2k$ (parents + children).
- STEP E: From the new population, select the $2n$ members with the lowest values of f .
- STEP F: If the absolute value of the difference between the mean value of f in the population of this generation and the mean value of f in the population of the previous generation is $< \varepsilon$, or the number of iterations is greater than the maximum number of iterations, say, N_{\max} , (which is defined by us), then STOP; otherwise go to STEP C.

No technique or method in the area of global optimization can always guarantee the convergence to the global minimum. However, in most cases the evolutionary computation (GA) leads to convergence to the global minimum, and the strategy of evolutionary computation has proved to be better than the conventional numerical methods with regard to the convergence to the global minimum. However, the convergence is slower, but in most cases, we can find the global minimum.

The GA used here is the basic GA, and one can use more sophisticated schemata. In many cases, GAs find the global minimum of the

minimization problem in question, in spite of the fact of its slow-convergence speed. While running the proposed GA, if we find that the minimum of

$$f = f(w_1, w_2, \dots, w_m) = \left| B(e^{jw_1}, e^{jw_2}, \dots, e^{jw_n}) \right|$$

is 0, then, the polynomial in question is unstable. However, if we find that the minimum of f is not zero, then we can guarantee that our polynomial is stable. The reason is that our function f is a function of $\cos(N_1^* w_1)$, $\sin(N_1^* w_1)$, $\cos(N_2^* w_2)$, and $\sin(N_2^* w_2)$, where N_1 and N_2 are the degrees of the polynomials with respect to z_1 and z_2 respectively, and $0 \leq w_i \leq 2\pi$, $i = 1, 2$.

Hence, taking appropriate equispaced initial population from 0 to 2π , for example, $2^* N_1$ points for w_1 and $2^* N_2$ for w_2 , we avoid being trapped in a local minimum.

In our examples, we have used t from $t = 12$ up to $t = 20$. For examples up to ten variables ($m = 10$), no convergence problem has been observed. The convergence is achieved after about 100–350 iterations. The time necessary to run the computer program on a PC Pentium 4 (2.4 GHz) is between 1 to 3 min, which is very satisfactory.

Example 1: Suppose that our 3-D system (without any nonessential singularity of the second kind), has the following characteristic polynomial:

$$B(z_1, z_2, z_3) = 0.8z_1 + 1.5z_1^2 z_2 + 1.8z_2^3 + 0.2z_3 + 1.3z_2 z_3^2 + 5.6.$$

Then, the first three conditions, i.e., (3.1)–(3.3) of the DeCarlo–Strintzis theorem are satisfied for $|z_i| \leq 1$ with $i = 1, 2$, and 3, respectively, since

$$B(z_1, 1, 1) = 1.5z_1^2 + 0.8z_1 + 8.9 \neq 0$$

$$B(1, z_2, 1) = 1.8z_2^3 + 2.8z_2 + 6.6 \neq 0$$

$$B(1, 1, z_3) = 1.3z_3^2 + 0.2z_3 + 9.7 \neq 0.$$

So, we have to examine the last equation in the DeCarlo–Strintzis theorem. To this end, let us consider $f = f(w_1, w_2, \dots, w_m) = |B(e^{jw_1}, e^{jw_2}, \dots, e^{jw_n})|$. We easily find that $f = \sqrt{Q_1^2 + Q_2^2}$, where

$$Q_1 = 0.8 \cos(w_1) + 1.5 \cos(2w_1 + w_2) + 1.8 \cos(3w_2) + 0.2 \cos(w_3) + 1.3 \cos(w_2 + 2w_3) + 5.6$$

$$Q_2 = 0.8 \sin(w_1) + 1.5 \sin(2w_1 + w_2) + 1.8 \sin(3w_2) + 0.2 \sin(w_3) + 1.3 \sin(w_2 + 2w_3).$$

Using now the previously presented GA with $n = 5$, $k = 4$, $t = 12$, $p = 0.01$, $c = 6$, and $\varepsilon = 10^{-4}$, we find that the optimum value of f as well as the mean value of f in each generation converges to zero (see Fig. 1). Therefore, for this example $\underline{M} = 0$ and the polynomial is (Schur) unstable.

Example 2: Suppose that our 3-D system (without any nonessential singularity of the second kind), has the following characteristic polynomial:

$$B(z_1, z_2, z_3) = z_1^2 + z_2^2 + z_3 - z_1 z_2 z_3 + 5.$$

The first three conditions, i.e., (3.1)–(3.3) of the DeCarlo–Strintzis theorem are satisfied for $|z_i| \leq 1$ where $i = 1, 2, 3$ respectively, since

$$B(z_1, 1, 1) = z_1^2 - z_1 + 7 \neq 0$$

$$B(1, z_2, 1) = z_2^2 - z_2 + 7 \neq 0$$

$$B(1, 1, z_3) = 7 \neq 0.$$

Hence, we have to examine the last equation in the DeCarlo–Strintzis theorem. As in Example 1, one has $f = \sqrt{Q_1^2 + Q_2^2}$, where

$$Q_1 = \cos(2w_1) + \cos(2w_2) + \cos(w_3) - \cos(w_1 + w_2 + w_3) + 5$$

$$Q_2 = \sin(2w_1) + \sin(2w_2) + \sin(w_3) - \sin(w_1 + w_2 + w_3).$$

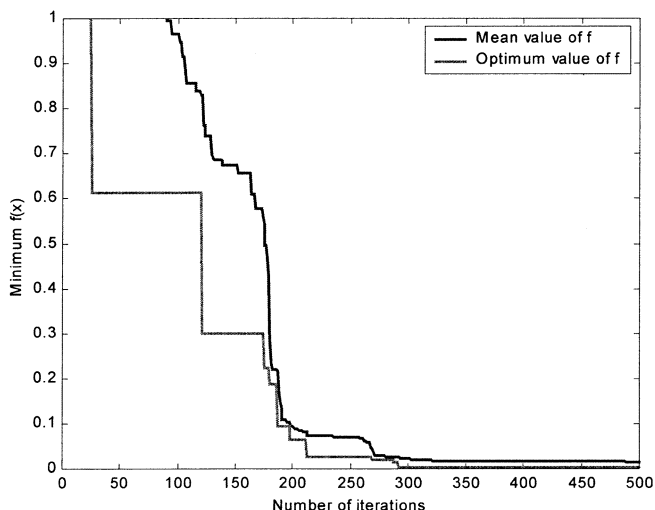


Fig. 1. Convergence of the optimum value of f as well as that of the mean value of f in every generation in Example 1.

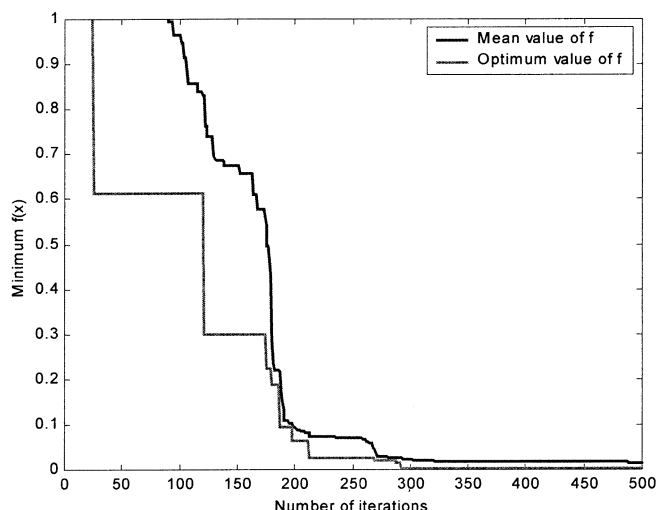


Fig. 3. Convergence of the optimum value of f as well as that of the mean value of f in every generation in Example 3.

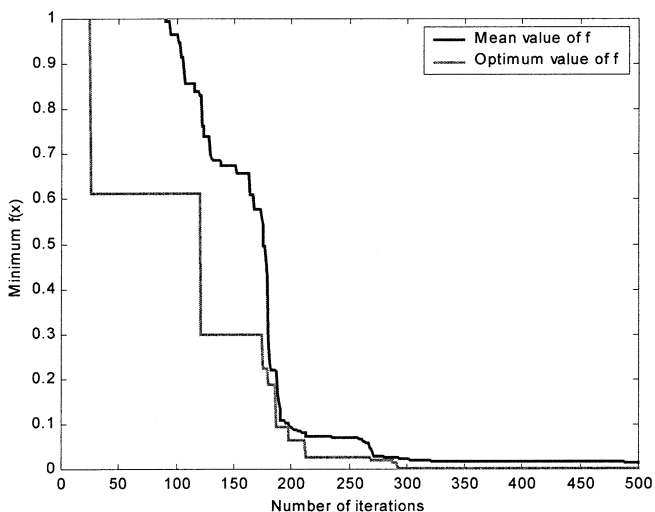


Fig. 2. Convergence of the optimum value of f as well as that of the mean value of f in every generation in Example 2.

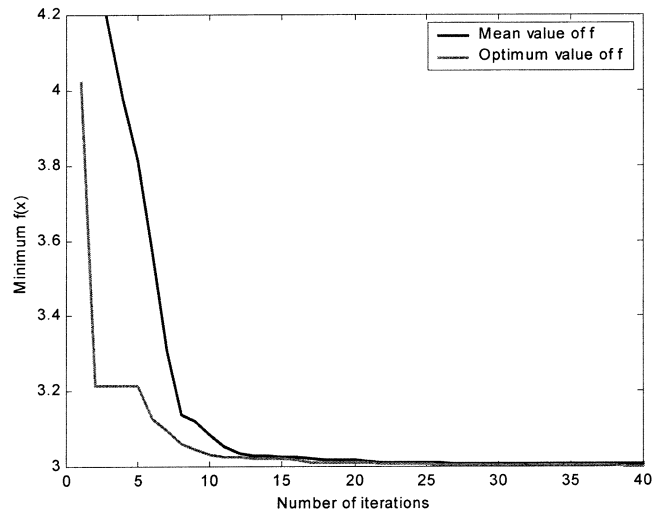


Fig. 4. Convergence of the optimum value of f as well as that of the mean value of f in every generation in Example 4.

Using the GA presented here with $n = 5, k = 4, t = 12, p = 0.01, c = 6$, and $\varepsilon = 10^{-4}$, we obtain that the optimum value of f as well as the mean value of f in each generation converges to unity (see Fig. 2). Therefore, for this example $\underline{M} > 0$, and the polynomial is (Schur) stable.

Example 3: Let our five-dimensional system (without any nonessential singularity of the second kind), has the following characteristic polynomial:

$$B(z_1, z_2, z_3, z_4, z_5) = z_1^2 z_3^3 + z_3^3 z_4^2 + z_1^3 z_2 z_5 + z_1 z_2 z_3 z_4 z_5 + 5.$$

The first five conditions, i.e., (3.1)–(3.5), of the DeCarlo–Strintzis theorem are satisfied for $|z_i| \leq 1$ where $i = 1, 2, 3, 4$, and 5 , respectively, because

$$B(z_1, 1, 1, 1, 1) = z_1^3 + z_1^2 + z_1 + 7 \neq 0$$

$$B(1, z_2, 1, 1, 1) = 2z_2 + 8 \neq 0$$

$$B(1, 1, z_3, 1, 1) = 2z_3^3 + z_3 + 7 \neq 0$$

$$B(1, 1, 1, z_4, 1) = z_4^2 + z_4 + 8 \neq 0$$

$$B(1, 1, 1, 1, z_5) = z_5^3 + 2z_5 + 7 \neq 0.$$

So, we have to examine the last equation in the DeCarlo–Strintzis theorem. Here, $f = \sqrt{Q_1^2 + Q_2^2}$, where

$$Q_1 = \cos(2w_1 + 3w_3) + \cos(3w_3 + 2w_4) + \cos(3w_3 + w_2 + w_5) + \cos(w_1 + w_2 + w_3 + w_4 + w_5) + 5$$

$$Q_2 = 2 \cos(2w_1) + \sin(3w_2) + \sin(4w_3) - \sin(5w_5) + 4 \sin(w_4) + \sin(w_1 + w_2 + w_3).$$

Using now the GA with $n = 5, k = 4, t = 12, p = 0.01, c = 6$, and $\varepsilon = 10^{-4}$, we obtain that the optimum value of f as well as the mean value of f in each generation converges to zero (see Fig. 3). Therefore, for this example $\underline{M} = 0$ and the polynomial is (Schur) unstable.

Example 4: Let our 2-D system (without any nonessential singularity of the second kind), has the following characteristic polynomial [26]:

$$B(z_1, z_2) = 6.5 + z_2 + 0.4z_2^2 + 0.4z_1 + 0.8z_1z_2 - 0.5z_1z_2^2 + 0.2z_1^2 - z_1^2z_2 + z_1^2z_2^2.$$

The first two conditions, i.e., (3.1), (3.2) of the DeCarlo–Strintzis theorem are satisfied for $|z_i| \leq 1$ where $i = 1, 2$ respectively, since

$$B(z_1, 1) = 0.2z_1^2 + 0.7z_1 + 7.9 \neq 0$$

$$B(1, z_2) = -0.1z_2^2 + 1.8z_2 + 7.1 \neq 0.$$

So, we have to examine the last equation in the DeCarlo–Strintzis theorem. As in Example 1, one has $f = \sqrt{Q_1^2 + Q_2^2}$, where

$$Q_1 = \cos(w_2) + 0.4 \cos(2w_2) + 0.4 \cos(w_1)$$

$$+ 0.8 \cos(w_1 + w_2) - 0.5 \cos(w_1 + 2w_2)$$

$$+ 0.2 \cos(2w_1) - \cos(2w_1 + w_2)$$

$$+ \cos(2w_1 + 2w_2) + 6.5$$

$$Q_2 = \sin(w_2) + 0.4 \sin(2w_2) + 0.4 \sin(w_1)$$

$$+ 0.8 \sin(w_1 + w_2) - 0.5 \sin(w_1 + 2w_2)$$

$$+ 0.2 \sin(2w_1) - \sin(2w_1 + w_2) + \sin(2w_1 + 2w_2).$$

Using the GA presented here with $n = 20$, $k = 4$, $t = 16$, $p = 0.1$, $c = 6$, and $\varepsilon = 10^{-4}$, we obtain that the optimum value of f as well as the mean value of f in each generation converges to 3 (see Fig. 4). Therefore, for this example, $\underline{M} > 0$, and the polynomial is (Schur) stable. The stability of this example has also been shown in [26].

III. CONCLUSION

It has been shown that GAs could prove to be a new useful tool for checking the stability of m -D ($m \geq 3$) systems. First, the m -D stability problem is reduced to an appropriate minimization problem by using the last condition of the DeCarlo–Strintzis theorem. Then, this minimization problem of the absolute value of its characteristic polynomial over the boundaries of its variables (i.e., on the m unit circles) can be tackled using GAs. The GA presented in this brief is the basic one, and we can use far more sophisticated schemata. In most cases the GAs find the global minimum of the minimization problem in question, in spite of its slow speed of convergence. Investigation of the concepts such as the m -D stability threshold or stability margin is left for future research. Furthermore, the present method can be improved if we use some heuristic techniques or other sophisticated techniques like the method of *variant mutation*, *zooming*, etc [25].

ACKNOWLEDGMENT

The authors are very grateful to the anonymous referees for their valuable comments.

REFERENCES

- [1] E. I. Jury, "Stability of multidimensional systems and related problems," in *Multidimensional Systems. Techniques and Applications*, S. Tzafestas, Ed. New York: Marcel-Dekker, 1985.
- [2] L. M. Roitman, M. N. S. Swamy, and G. Eichmann, "BIBO-stability in the presence of nonessential singularities of the second kind in 2-D digital filters," *IEEE Trans. Circuits Syst.*, vol. CAS-34, pp. 60–72, Jan. 1987.
- [3] E. I. Jury, "Stability of multidimensional scalar and matrix polynomials," *Proc. IEEE*, vol. 66, pp. 1018–1045, Sept. 1978.
- [4] B. D. O. Anderson and E. I. Jury, "Stability of multidimensional digital filters," *IEEE Trans. Circuits Syst.*, vol. CAS-21, pp. 300–305, Mar. 1974.
- [5] A. Kanellakis, S. Tzafestas, and N. Theodorou, "Stability tests for 2-D systems using the Schwarz form and the inners determinants," *IEEE Trans. Circuits Syst.*, vol. 38, pp. 1071–1077, Sept. 1991.

- [6] E. Zeheb, "Another simplification in multidimensional stability tests," *IEEE Trans. Acoust., Speech, Signal Processing*, vol. ASSP-32, pp. 453–455, Apr. 1984.
- [7] E. Zeheb and D. Hertz, "Another proof and a generalization of a theorem on N-dimensional stability," *Proc. IEEE*, vol. 72, pp. 745–746, June 1984.
- [8] N. E. Mastorakis, "A method for computing the 2-D stability margin based on a new stability test for 2-D systems," *Multidim. Syst. Signal Processing*, vol. 10, pp. 93–99, 1998.
- [9] —, "New stability test for 2-D systems," *Foundations of Computing and Decision Science*, vol. 21, no. 2, pp. 115–122, 1996.
- [10] —, "New necessary stability conditions for 2-D systems," *IEEE Trans. Circuits Syst.*, vol. 47, pp. 1103–1105, July 2000.
- [11] —, "A method for computing the 2-D stability margin," *IEEE Trans. Circuits Syst. II*, vol. 45, pp. 376–379, Mar. 1998.
- [12] —, "Recursive algorithms for two-dimensional filters' spectral transformations," *IEEE Trans. Signal Processing*, vol. 44, pp. 2647–2651, Oct. 1996.
- [13] L. M. Roitman, M. N. S. Swamy, and G. Eichmann, "An efficient numerical scheme to compute 2-D stability thresholds," *IEEE Trans. Circuits Syst.*, vol. CAS-34, pp. 322–324, Mar. 1987.
- [14] M. G. Strintzis, "Tests of stability of multidimensional filters," *IEEE Trans. Circuits Syst.*, vol. CAS-24, pp. 432–437, Aug. 1977.
- [15] P. Agathoklis and L. Bruton, "Practical-BIBO stability of n -dimensional discrete systems," *Proc. Inst. Elect. Eng.*, pt. G, vol. 130, no. 6, pp. 236–242, 1983.
- [16] M. N. S. Swamy, L. M. Roitman, and E. I. Plotkin, "On stability of three and higher dimensional linear shift-invariant digital filters," *IEEE Trans. Circuits Syst.*, vol. CAS-32, pp. 888–892, Sept. 1985.
- [17] X. Xiheng Hu, "Stability tests of N-dimensional discrete time systems using polynomial arrays," *IEEE Trans. Circuits Syst. II*, vol. 42, pp. 261–269, Apr. 1995.
- [18] S. Yost and P. Bauer, "Shift-variant m -D systems and singularities on \mathcal{T}^m : implications four robust stability," *IEEE Trans. Circuits Syst. I*, vol. 42, pp. 477–479, Aug. 1995.
- [19] N. Matsumoto, "On some properties of N-D discrete-time BR systems and time-delay BR systems," *IEEE Trans. Circuits Syst. II*, vol. 42, pp. 291–295, Apr. 1995.
- [20] P. Agathoklis and M. Mansour, "Sufficient conditions for instability of two -and higher dimensional discrete systems," *IEEE Trans. Circuits Syst.*, vol. 29, pp. 486–488, July 1982.
- [21] M. Ahmadi and R. A. King, "A stability criterion for N-dimensional zero-phase recursive digital filters," *Proc. IEEE*, vol. 65, pp. 893–899, June 1977.
- [22] P. Bauer and E. Jury, "BIBO stability of multidimensional shift invariant discrete systems," *IEEE Trans. Automat. Contr.*, vol. 36, pp. 1057–1060, Sept. 1991.
- [23] D. E. Goldberg, *Genetic Algorithms in Search, Optimization and Machine Learning*, 2nd ed. Reading, MA: Addison-Wesley, 1989.
- [24] R. Eberhart, P. Simpson, and R. Dobbins, *Computational intelligence PC tools*. Orlando, FL: Academic Press, 1996.
- [25] H. Sellami and F. Karray, "Global optimization using genetic algorithm with zooming," in *Proc. Computational Engineering in Systems Applications 'CESA'98*, Nabeul-Hammamet, Tunisia, Apr. 1–4, 1998, pp. 59–63.
- [26] D. Raghuramireddy and R. Unbehauen, "Stability of 2-D recursive filters without distortion of the amplitude spectrum," *IEEE Trans. Circuits Syst.*, vol. CAS-32, pp. 1296–1298, Dec. 1985.

Comments and Corrections

Corrections to “Stability of Multidimensional Systems Using Genetic Algorithms”

Nikos E. Mastorakis, Ioannis F. Gonos, and M. N. S. Swamy

In [1, Ex. 3], the term z_5^3 was left out from the characteristic polynomial $B(z_1, z_2, z_3, z_4, z_5)$. The correct form of the characteristic polynomial is

$$B(z_1, z_2, z_3, z_4, z_5) = z_1^2 z_3^3 + z_3^3 z_4^2 + z_1^3 z_2 z_5 + z_1 z_2 z_3 z_4 z_5 + z_5^3 + 5.$$

The first five conditions of the DeCarlo–Strintzis Theorem given in [1] are correct, and are satisfied for $|z_i| \leq 1$, where $i = 1, 2, 3, 4, 5$, as

$$B(z_1, 1, 1, 1, 1) = z_1^3 + z_1^2 + z_1 + 7 \neq 0$$

$$B(1, z_2, 1, 1, 1) = 2z_2 + 8 \neq 0$$

$$B(1, 1, z_3, 1, 1) = 2z_3^3 + z_3 + 7 \neq 0$$

$$B(1, 1, 1, z_4, 1) = z_4^2 + z_4 + 8 \neq 0$$

$$B(1, 1, 1, 1, z_5) = z_5^3 + 2z_5 + 7 \neq 0.$$

For the last condition in the DeCarlo–Strintzis Theorem, the expression $f = \sqrt{Q_1^2 + Q_2^2}$ has to be calculated. Expressions Q_1 and Q_2 in [1] have errors. The correct expressions are

$$\begin{aligned} Q_1 &= \cos(2w_1 + 3w_3) + \cos(3w_3 + 2w_4) + \cos(3w_1 + w_2 + w_5) \\ &\quad + \cos(w_1 + w_2 + w_3 + w_4 + w_5) + \cos(3w_5) + 5 \\ Q_2 &= \sin(2w_1 + 3w_3) + \sin(3w_3 + 2w_4) + \sin(3w_1 + w_2 + w_5) \\ &\quad + \sin(w_1 + w_2 + w_3 + w_4 + w_5) + \sin(3w_5). \end{aligned}$$

Both the optimum and mean values of f in each generation converge to zero (as correctly presented in [1, Fig. 3]) using the GA with $n = 5$, $k = 4$, $t = 12$, $p = 0.01$, $c = 6$, and $\varepsilon = 10^{-4}$. Therefore, for this example, $M = 0$ and the polynomial is (Schur) unstable.

REFERENCES

- [1] N. E. Mastorakis, I. F. Gonos, and M. N. S. Swamy, “Stability of multidimensional systems using genetic algorithms,” *IEEE Trans. Circuits Syst. I, Fundam. Theory Appl.*, vol. 50, no. 7, pp. 962–965, Jul. 2003.

Manuscript received February 22, 2005. This paper was recommended by Associate Editor K. Thulasiraman.

N. E. Mastorakis is with the Department of Computer Science, Military Institution of University Education, Hellenic Naval Academy, Piraeus 18539, Greece (e-mail: mastorakis@ieee.org).

I. F. Gonos is with the High Voltage Laboratory, School of Electrical and Computer Engineering, National Technical University of Athens, 9 Iroon Politechniou St., Zografou Campus, GR 15780, Athens, Greece (e-mail: igonos@ieee.org).

M. N. S. Swamy is with the Center for Signal Processing and Communications, Department of Electrical and Computer Engineering, Concordia University, Montreal, QC H3G 1M8, Canada (e-mail: swamy@ece.concordia.ca).

Digital Object Identifier 10.1109/TCSI.2005.852017

Corrections to “A Universal Architecture for Designing Efficient Modulo $2^n + 1$ Multipliers”

Leonel Sousa and Ricardo Chaves

In [1], in the right column of p. 1167, two lines above equation (7), the sentence should read: where $p_k(000, 111)$. In the published paper, the comma between 000 and 111 is missing. The error is regretted.

In the left column of p. 1169, the third line of second paragraph should read $i = n/2$ ($x_{n+1} = x_n = 0$). In the published paper, the space between $n/2$ and ($x_{n+1} = x_n = 0$) is missing. The error is regretted.

Similarly, author biographies contained some typographical errors. The corrected author biographies are presented below.

Leonel Augusto Sousa (M’01–SM’03) received the Ph.D. degree in electrical and computer engineering from the Instituto Superior Técnico (IST), Technical University of Lisbon, Portugal, in 1996.

He is currently a member of the Electrical and Computer Engineering Department at IST, and a Senior Researcher at Instituto de Engenharia de Sistemas e Computadores R&D (INESC-ID). His research interests include VLSI architectures, computer architectures, parallel and distributed computing, and multimedia systems. He has contributed more than 70 papers to international journals and conferences and he is a member of HiPEAC European Network of Excellence. He is a member of ACM.

Ricardo Chaves received the M.Sc. degree in electronics and computer science from the Instituto Superior Técnico (IST), Technical University of Lisbon, Portugal, in 2003. He is working toward the Ph.D. degree in electrical engineering at the Instituto de Engenharia de Sistemas e Computadores R&D (INESCID), a research institute associated with IST, where he is also a Researcher.

His research interests include computer architectures and design of VLSI circuits.

REFERENCES

- [1] L. Sousa and R. Chaves, “A universal architecture for designing efficient modulo $2^n + 1$ Multipliers,” *IEEE Trans. Circuits Syst. I, Reg. Papers*, vol. 52, no. 6, pp. 1166–1178, Jun. 2005.

Manuscript received June 16, 2005.

The authors are with the Electrical and Computer Engineering Department, Instituto Técnico (IST) and Instituto de Engenharia de Sistemas e Computadores (INESC-ID), 1000-029 Lisbon, Portugal (e-mail: Leonel.Sousa@inesc-id.pt; Ricardo.Chaves@inesc-id.pt).

Digital Object Identifier 10.1109/TCSI.2005.856130